


LED LIGHTING




Instruction

Manual

Please read this manual carefully before operating the LED light.



● LED DISPLAY FUNCTIONS

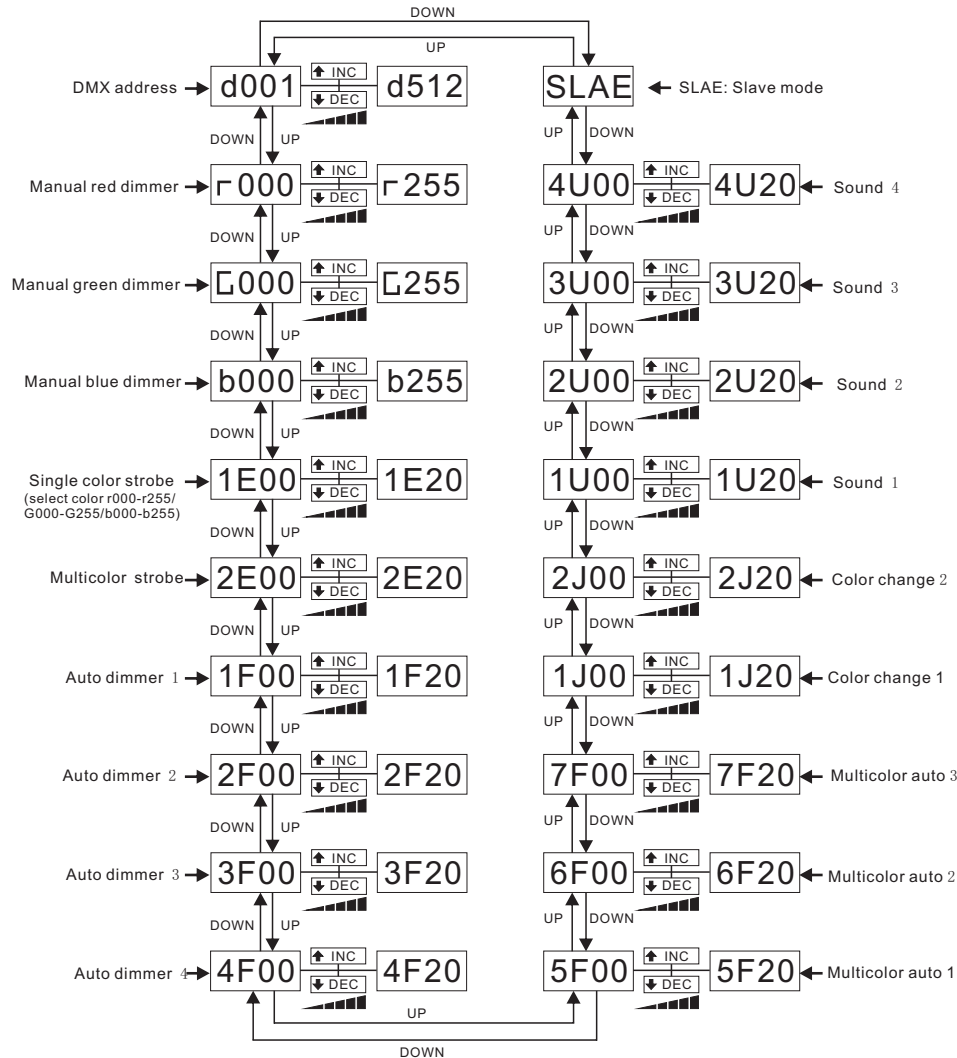

● DMX VALUES AND FUNCTIONS

Channel	Values	Functions
1	0-255	manual red dimmer 0-100%
2	0-255	manual green dimmer 0-100%
3	0-255	manual blue dimmer 0-100%
4	0-255	0-27 no function 28-55 single color strobe (channel 1/2/3 control the color, channel 6 control the speed) 56-83 multicolor strobe (channel 1/2/3 on top value, channel 6 control the speed) 84-255 choose the color
5	0-255	1-90 single color dimmer 91-103 auto dimmer 1 104-116 auto dimmer 2 117-129 auto dimmer 3 130-142 auto dimmer 4 143-155 color change 1 156-168 color change 2 169-181 multicolor auto 1 182-194 multicolor auto2 195-207 multicolor auto3 208-220 sound1 221-233 sound2 234-246 sound3 247-255 sound4 (channel1-4 will not work in this mode. Channel 6 control the speed)
6	0-255	Control the speed
7	0-255	Master dimmer

● SPECIFICATIONS

- Rate Voltage: AC100V-240V 50Hz-60Hz
- Rate Power: 240W
- Lamp: Super bright, 3 in 1 LED Lamps
- Quantity of Lamp: 80pcs
- N.W.: 3.3kg

NOTE: for safety fake, quantity for this item which is connected hand by hand can not surpass 6 pcs.